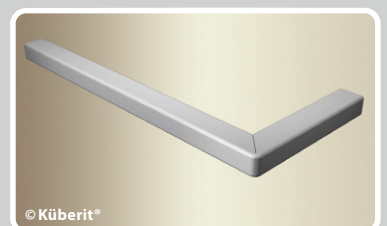




Smart solution with 90° prefabricated angle Type 279 as staircase panelling





Prefabricated prefabricated angles made of aluminium for elegant installation

- Time-saving, as no time-consuming mitre cuts are necessary on the construction site
- Walkable barefoot, no sharp edges
- For elastic or textile floor coverings up to 3.0 mm
- Standard leg lengths of 300, 1,000 and 1,500 mm
- Different dimensions, degrees or colours are possible on request



Prefabricated angle solution for laterally open stairs

FINISHED ANGLE 279 IN COMBINATION WITH 870 + 871

870 STAIR NOSING PROFILE	871 STAIR NOSING PROFILE	279 U ANGLE PROFILE	Version FW PREFABRICATED ANGLE	Version FW-L PREFABRICATED ANGLE LEFT	Version FW-R PREFABRICATED ANGLE RIGHT
					
COLOUR F4 · F16	COLOUR F4 · F16	COLOUR F4 · F16	COLOUR F4 · F16	COLOUR F4 · F16	COLOUR F4 · F16
LENGTH 2,50 · 5,00 m	LENGTH 2,50 · 5,00 m	LENGTH 3,05 m	LENGTH 0,3 x 0,3	LENGTH 0,3 x 1,0 · 0,3 x 1,5 m	LENGTH 1,0 x 0,3 · 1,5 x 0,3 m

S = Predetermined bending point



Simple installation:

- 1.**
Fit the stair nosing and cover the stair tread with suitable floor covering.
- 2.**
Measure the height of the riser and adjust the prefabricated angle 279 accordingly.
Mark the exact recess (see picture).
Use the marking to notch out the required area.
- 3.**
Glue in place with a suitable adhesive.
The elegant staircase solution is ready!



F4
F16
FW

ALUMINIUM silver
ALUMINIUM powder-coated
black matte (RAL 9005)
PREFABRICATED ANGLE

COLOURS



**PRODUCT
PLATFORM**
pro.kueberit.com

